
AUTOMATION MATERIALFLUSS INTRALOGISTIK



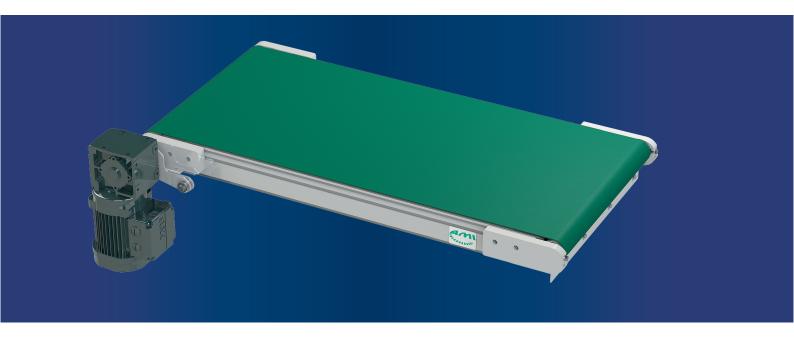

POWERED SMALL BELT CONVEYOR KGF65-KA

PRODUCT DESCRIPTION

The KGF 65-KA small belt conveyor has a head drive (K) with slip-on gearbox (A). The KGF 65-KA is used for transporting goods that are to be moved mainly horizontally and at an angle, such as containers, unit loads, trays and cardboard boxes, as well as for accumulating oriented individual parts and for interlinking machines and systems. The base frame of the belt conveyor is built on an aluminum profile base. Additional system accessories can be attached through the side grooves.

TECHNICAL SPECIFICATIONS

| Length | 2.000 mm |
|--------------------------|---|
| Width | 400 mm |
| Outer Width | 450 mm |
| Speed | 0,5 m/s Adjustable via frequency converter on request. This can be purchased as an accessory. |
| Drive/OEM | Geardrive SEW 0,18kW, Type WA20 |
| Voltage | 3 Ph, 230/400 V, 50 Hz |
| Drive type | Shaft-mounted gearbox |
| Drive arrangement | Head drive station, pulling to the left in conveying direction |
| Drive and return pulley: | Ø52 mm |
| Belt | PVC 2- layered, Febor 12CF, smooth, green |
| Weight / Load | max. 25 kg pro Meter und max. 75 kg auf dem kompletten Förderer |
| Included in delivery | documentation with EC declaration of incorporation in German |
| Customs tariff number | 84283300 |
| Country of origin | Germany |
| Weight | About 45kg |
| Delivery time | From stock (while stocks last) |
| AMI article number | 02031275 |